



## WKFX EMERGENCY BULKHEAD WITH LITHIUM BATTERY

Our Emergency Bulkheads are LIA certified and manufactured to provide full compliance to BS 60598-2-22

The product can be wired for either maintained or non-maintained operations and has IP65 protection along with IK10. It can be used for indoor or outdoor applications.

Self test versions can be isolated and switched to manual test mode using the remote control FXARC thus allowing manual testing to be carried out using the remote control (No secret key required for testing or the turning off of whole areas)



### Features:


- **5 year warranty including batteries**
- Lithium ion battery (serviceable)
- IP65 self-contained emergency luminaire
- IK10 impact rating
- Low stand-by power consumption < 0.5W (NM mode)
- Self-test versions and remote control available
- Maintained or non-maintained configurations as standard
- Ceiling or Wall mounting
- Suitable for indoor or outdoor applications
- Supplied with self adhesive ISO exit legends
- Suitable for BESA and surface conduit
- Colour Temp: 4000K  
CRI>80
- Recessing kit available

WKFX

Order Codes	
WKFX-170-M3	WKFX IP65, IK10, M3,170LM (MAINS & EMERGENCY)
WKFX-170-M3-AST	WKFX IP65, IK10, M3, ADVANCED SELF TEST,170LM (MAINS & EMERGENCY)
WKFX-320-M3-AST	WKFX IP65, IK10, M3, ADVANCED SELF TEST, 320LM (MAINS & EMERGENCY)
FXARC	ADVANCED REMOTE CONTROL
WKFX/RB	WKFX RECESSING KIT

AST (Advanced Self-Test)

This is a self-test luminaire\*. Functional test is carried out automatically once a week and runs for 30 seconds. Full duration test is carried out automatically every 52 weeks. First full duration test is carried out automatically within the first 4 weeks after the luminaire being connected to mains voltage. This luminaire can be used in conjunction with the Advanced Remote Control (FXARC). FXARC is an optional tool that adds extra features to AST emergency luminaires.

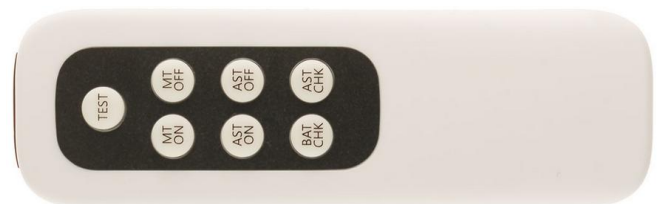

Advanced Remote Control (FXARC)

FXARC is a multifunction remote control suitable for MT and AST luminaire.

Our FXARC remote control provides the person responsible for the emergency lighting with the means to check battery life and the self-testing status; and carry out functional and full duration tests without needing the use of a ladder or a cherry picker - a key health and safety issue.