

# CORDOR-3

## Product Data

Warranty	5 years
Applications	Interior
Certification(s)	CE, RoHS

## Physical Data

Colour Finish	White
Luminaire Fixing	Surface mounted, suspended
Construction Material	Steel (plastic end caps)
Diffuser Type	Polycarbonate -TP(a) rated

## Electrical Data

Voltage Range	AC220-240V
Power Factor	>0.90
Inrush Current	<60A
Protection Class IEC	Class I

## Performance Data

°Kelvin	4000K
Efficacy	~111-125 Lm/W
Operating Temperature	-20°C to +45°C (0°C to 40°C for emergency)
Beam Angle	140°
Operating Hours	>50000
CRI	>85 Ra
IP Rating	IP20
IK Rating	IK08
Macadam Ellipse	≤4 sdcM
L70 B50	70,000 hours
L80 B50	50,000 hours
L90 B50	25,000 hours
LEDs	Epistar


Uniform light distribution and high efficacy



## Part Codes



	Wattage	Lumens	Length (mm)	Unit Weight (kg)	Running Current
CD3/4/20W4K	20W	2416	1178	2.7	600mA
CD3/4/40W4K	40W	4812	1178	2.7	1000mA
CD3/5/30W4K	30W	3619	1478	3.4	750mA
CD3/5/60W4K	60W	7226	1478	3.4	1600mA
CD3/6/40W4K	40W	4818	1778	4.4	1000mA
CD3/6/68W4K	68W	8145	1778	4.4	1.8mA

## Dimensions (mm)

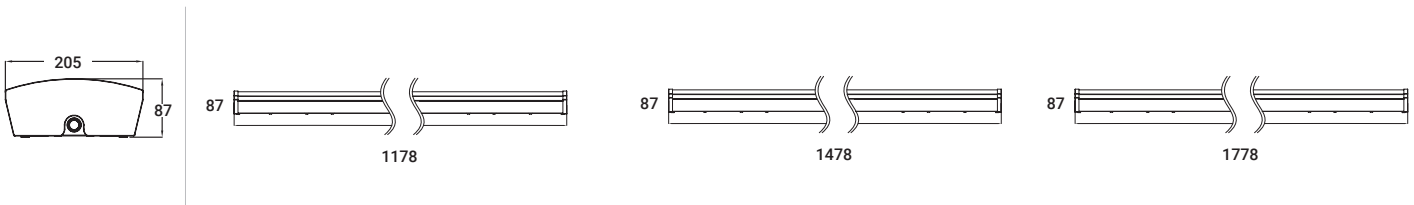

Options:	
-01	LED Standard
-02	c/w Microwave
-03	c/w Corridor Function
-04	c/w Microwave & Corridor Function
-05	c/w Emergency M3
-06	c/w Emergency & Microwave
-07	c/w Emergency & Corridor Function
-08	c/w Emergency, Microwave & Corridor Function

\* Dali, DSI, SELF-TEST and other options are also available

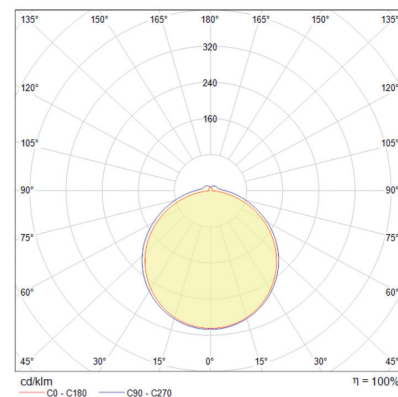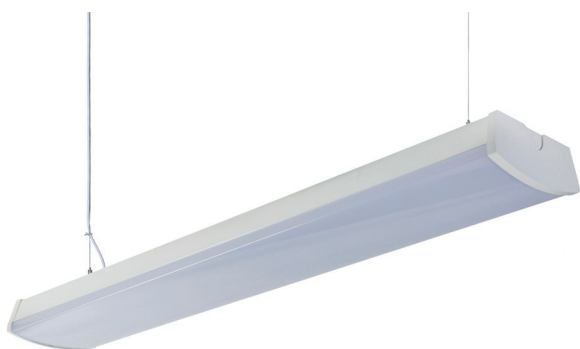

## Add on

### Part Code

CD3-SUS

1.5m suspension kit

