



## WEXFX

Our Emergency Exit Signs are LIA certified and manufactured to provide full compliance to BS 60598-2-22

The product comes complete with ISO Arrow up legend and can be wired for either maintained or non-maintained operation. It is self test ready and can be switched from manual test to self test by using the remote control. Manual test mode can be carried out using the remote control, no requirement for secret key or turning off the whole area.

The Exit has a dedicated downlight providing a much improved downwards illumination and can eliminate the need for additional emergency lighting by the final exit.

### Dimensions:



### Features:

- **5 year warranty including batteries**
- Lithium ion battery (serviceable)
- Wall mounted self-contained emergency LED exit box
- Cable entry to Sides, top and rear (20mm cut-outs)
- BESA entry on rear
- Viewing distance: 34m
- 3W Maintained.  
Low stand-by power consumption < 0.5W (NM mode)
- Self-test versions and remote controls available
- Maintained or non-maintained configurations as standard
- Suitable for indoor applications
- Terminal block takes upto 4 x 1.5mm<sup>2</sup>
- IK07, IP20

Order Code:	
WEXFX-34M-M3-MT/AST	WEXFX EXIT, 34M VIEWING DISTANCE, WHITE, M3, MANUAL/SELF TEST <b>C/W ISO ARROW UP LEGEND</b>
WEXFX-34M-M3-DA2	WEXFX EXIT, 34M VIEWING DISTANCE, WHITE, M3, DALI2 (NO LEGEND- LEGEND SOLD SEPARATELY)
Options:	
WEXFX-LEG-ISOAD	LEGEND ISO ARROW DOWN
WEXFX-LEG-ISOAL	LEGEND ISO ARROW LEFT
WEXFX-LEG-ISOAR	LEGEND ISO ARROW RIGHT
WEXFX-LEG-ISOAU	LEGEND ISO ARROW UP
FXARC	ADVANCED REMOTE CONTROL


## AST (Advanced Self-Test)

This is a self-test luminaire\*. Functional test is carried out automatically once a week and runs for 30 seconds. Full duration test is carried out automatically every 52 weeks. First full duration test is carried out automatically within the first 4 weeks after the luminaire being connected to mains voltage. This luminaire can be used in conjunction with the Advanced Remote Control (FXARC). FXARC is an optional tool that adds extra features to AST emergency luminaires.

## MT (Manual Test)

This luminaire needs to be tested and test results recorded by a competent person according to BS EN 50172:2004. This luminaire can be used in conjunction with the Advanced Remote Control (FXARC). FXARC is an optional tool that adds new features to AST and MT emergency luminaires. If functional test or full duration test is initiated via FXARC the MT luminaire will automatically switch to mains mode after the functional or full duration test is completed. This luminaire may have an integrated test button for quick functional test.

**Note that MT emergency luminaires work independently from the remote control. FXARC remote control is an optional tool.**

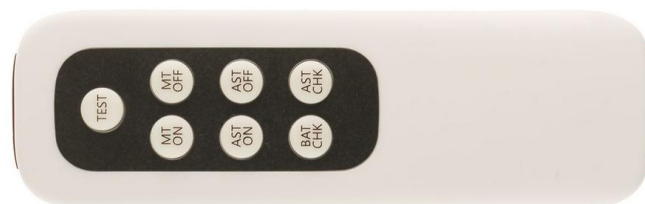

## Advanced Remote Control (FXARC)

FXARC is a multifunction remote control suitable for MT and AST luminaire.

Our FXARC remote control provides the person responsible for the emergency lighting with the means to check battery life and the self-testing status; and carry out functional and full duration tests without needing the use of a ladder or a cherry picker - a key health and safety issue.