



## EYELID-MINI

Utilising the latest led technology, the Eyelid-Mini luminaires are perfect for providing low energy/long life lighting solutions for interior, exterior and amenity applications.

The Eyelid-Mini luminaire provides an attractive but robust solution for providing lighting to walkways, tunnels, storage areas, car parks etc.

The enclosure is sealed to IP65 and houses a geartray with HF electronic driver, photocell controller, emergency gear (where required) and LED board. The polycarbonate optic provides excellent photometric performance (1240 luminaire lumens).

### **Stylish and resilient**

The robust cast aluminium shell and polycarbonate lens is vandal resistant and provides protection to IP65. The integrated photocell controller also has an internal switch override, giving complete control.

### **Dimensions**


Eyelid-Mini

### **Features**

- Cast aluminium and polycarbonate construction
- Photocell activation
- Attractive and robust vandal resistant design to IP65
- Simple installation
- 14 watt, 1240 lumens LED
- Ideal for interior & exterior environments
- Emergency lighting version available
- 5 year warranty

265mm (L) x 165mm (W) x 95mm (D)

## Photometric Data and Mechanical Detail

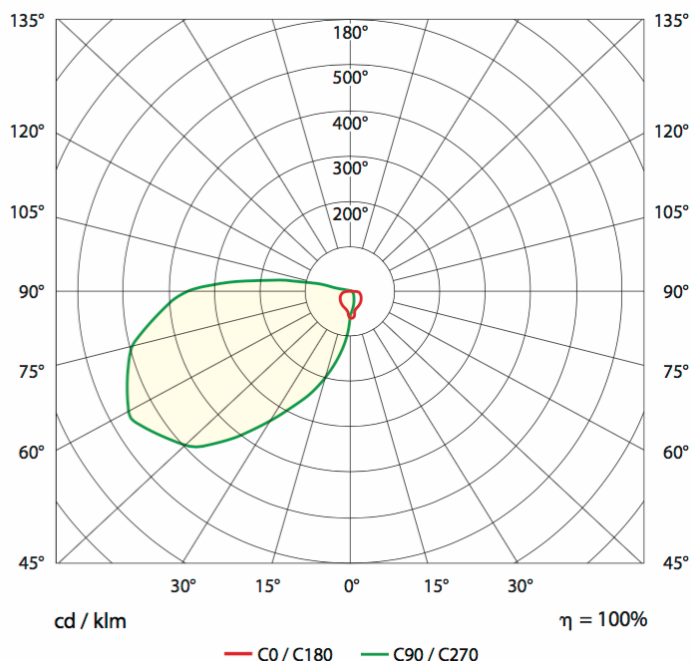

### Photometry

<b>Luminaire Lumen Output</b>	1240 lumens
<b>Colour Temperature</b>	5000K as standard
<b>RA</b>	>80 as standard
<b>Efficiency</b>	94lm/W

### Specification

<b>Light Source</b>	LED (5000K) CRI >80
<b>Driver</b>	High PF Electronic
<b>Insulation Class</b>	Class 1 - EN60598
<b>Environmental Rating</b>	IP65
<b>Maximum Weight</b>	2.7kg
<b>Emergency Battery</b>	4.8V 1.8Ah NiCd

### Order Code

ELDM/P/BLK	Eyelid Mini Mains c/w Photo cell, Black finish
ELDM/P/M3/BLK	Eyelid Mini c/w Photo cell, Black finish- Emergency



\*Other options may be available on request