




## BLADE

Although recessed **BLADE LED** luminaires have a similar appearance to conventional recessed exit signs these LED fittings are much smaller and make installations far more attractive. The housing has adjustable arms to simplify installation into different thickness supporting surfaces and the visible ceiling plate is available with a choice of finishes. These are supplied with integral Maintained emergency lighting control gear powering 15 high brightness white LEDs which clearly and evenly illuminate the safety sign legends.

**BLADE LED** luminaire comply with the relevant requirements of EN60598.2.22

### GENERAL SPECIFICATION

Operation	Maintained
Light Source	15 Long life white LEDs
Battery	4.8V 1.1Ah NiCd
Charge Current	200mA nominal
Recharge Period	24hrs (14hrs for 1hr duration)
Input Voltage	230V $\pm$ 10% ~ 50Hz
Power	12VA
IP Rating	IP20

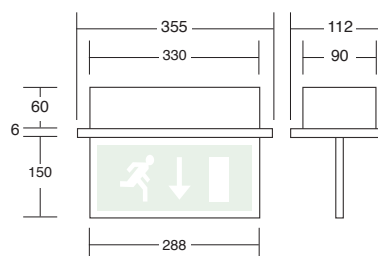

### Dimensions

Blade	355mm x 112mm
-------	---------------



Part code	
BL/LED/M3/WH/PLE	Recessed LED exit sign, Maintained, White
BL/LEDDAWH-PLE-1	Recessed LED exit sign, Maintained, White, Dali c/w ISOAD legend
BL/LEDDAWH-PLE-2	Recessed LED exit sign, Maintained, White, Dali c/w ISOLR legend
Options	
/ECAR	EC Format – Arrow Right
/ECAL	EC Format – Arrow Left
/ECAD	EC Format – Arrow Down
/ISOAR	ISO Format – Arrow Right
/ISOAL	ISO Format – Arrow Left
/ISOAU	ISO Format – Arrow Up