

CORDOR 3

Product Data

Warranty	5 years
Applications	Interior
Certification(s)	CE, RoHS

Physical Data

Colour Finish	White
Luminaire Fixing	Surface mounted, suspended
Construction Material	Steel (plastic end caps)
Diffuser Type	Polycarbonate -TP(a) rated


Electrical Data

Voltage Range	AC220-240V
Power Factor	>0.90
Inrush Current	<60A
Protection Class IEC	Class I

Performance Data

°Kelvin	4000K
Efficacy	~111-125 Lm/W
Operating Temperature	-20°C to +45°C (0°C to 40°C for emergency)
Beam Angle	140°
Operating Hours	>50000
CRI	>85 Ra
IP Rating	IP20
IK Rating	IK08
Macadam Ellipse	≤4 sdc _m
L70 B50	70,000 hours
L80 B50	50,000 hours
L90 B50	25,000 hours
LEDs	Epistar

Dimensions (mm)

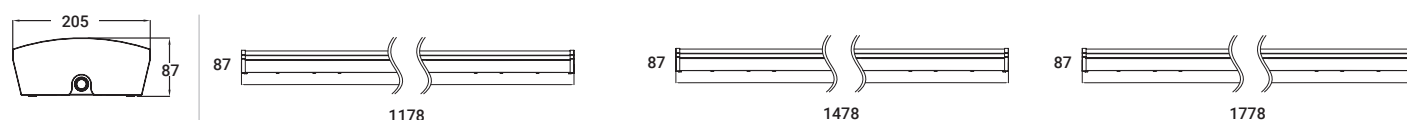

Part Code	
CD3/4/20W4K	CORDOR 3 4FT 20W 2416LM
CD3/4/40W4K	CORDOR 3 4FT 40W 4812LM
CD3/5/30W4K	CORDOR 3 5FT 30W 3619LM
CD3/5/60W4K	CORDOR 3 5FT 60W 7226LM
CD3/6/40W4K	CORDOR 3 6FT 40W 4818LM
CD3/6/68W4K	CORDOR 3 6FT 68W 8145LM
Options:	
-01	LED Standard
-02	c/w Microwave
-03	c/w Corridor Function
-04	c/w Microwave & Corridor Function
-05	c/w Emergency M3
-06	c/w Emergency & Microwave
-07	c/w Emergency & Corridor Function
-08	c/w Emergency, Microwave & Corridor Function

* Dali, DSI, SELF-TEST and other options are also available

Add on

Part Code	
CD3/SUS	1.5M SUSPENSION KIT

