

ELEANOR

Product description

- Edgelit panel for direct recessed mount and surface or suspended mount with accessories
- Two luminous flux range variants 2,900 or 3,900 lm
- For suspended ceiling grid measure of 600 mm
- Product colour (frame) RAL 9003
- IK02
- Efficacy of the module up to 116 lm/W
- High colour rendering index CRI > 80
- Small colour tolerance (MacAdam 4) 1
- **UGR < 19**
- Small luminous flux tolerances
- Colour temperatures 3,000, 4,000 and 6,500 K
- Diffusor material standard article: PS, diffusor material **TPA article: PC**
- Lightguide material: PMMA
- Long life-time: 50,000 hours
- 5-year guarantee
- Dali, DSI, Switch Dim, 1-10v & other dimming options
- Self-Test and Dali EMPRO options

Technical data

Beam characteristic	90°
Ambient temperature range	-20 ... +40 °C
tp rated	45 °C
tc	70 °C
Irated	800 mA
I _{max}	900 mA
Max. permissible LF current ripple	1,170 mA
Max. permissible peak current	1,500 mA / max. 10 ms
Max. working voltage for insulation SELV	60 V
Insulation test voltage	0.5 kV
ESD classification	Severity level 2
Risk group (EN 62471:2008) ²	RG0
Classification acc. to IEC 62031	Independent
Type of protection	IP20
Lumen maintenance L70B50	50,000 h
Guarantee	5 years

Dimensions

595mm x595mm

Option 1	
ELATG228W	ELEANOR TPA GENERATION-2 UGR19 28W, 2900LM
ELATG236W	ELEANOR TPA GENERATION-2 UGR19 36W, 3900LM
Option 2	
4K	Colour 4000K
3K	Colour 3000K
Option 3	
-01	LED MAINS
-05	C/W 3HR EMERGENCY

Ordering Part no. Format -

Option1Option2Option3: ELATG236W4K-05 - ELEANOR TPA UGR19, 36W, 4K C/W EMERGENCY


***Other dimming options available** e.g. DALI, DSI, SWITCH DIM, 1-10V AND PHASE DIM

***Emergency options available** - SELF TEST and DALI EMPRO

Pathfinder.

Pathfinder is a robust bollard with a classic look suitable for most applications. It has a durable extruded aluminium body and polycarbonate lens providing good levels of vandal resistance. With silver grey coated louvred controller, it provides symmetrical distribution and minimal glare.

Sealed to IP65 with silicone gasket kit.

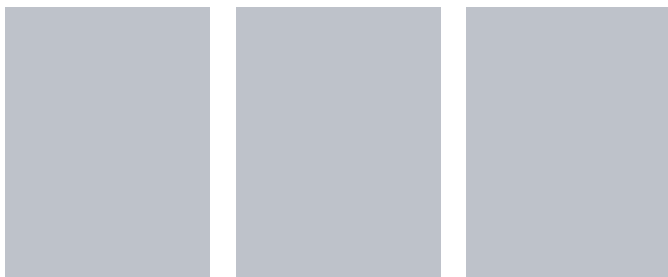

▲ Dome head

▲ Flat head

▲ Flat head with louvre

Features

- Selectable CCT - 3000K/4000K
- Power 25W
- 3 year warranty
- C/W concrete fixings, J Bolts & Root Mount Kit is available to order separately
- IP65 & IK09 rated
- Emergency options available including self test
- Available with Flat head, Dome head or Flat head with Louvre


Applications

- Urban environment
- Residential
- Hospitality and Leisure
- Retail
- Commercial
- Pathways and Parks

Pathfinder.

Pathfinder is a robust bollard with a classic look suitable for most applications. It has a durable extruded aluminium body and polycarbonate lens providing good levels of vandal resistance. With silver grey coated louvred controller, it provides symmetrical distribution and minimal glare.

Sealed to IP65 with silicone gasket kit.

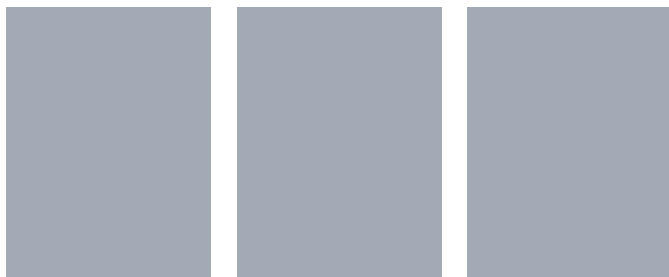

▲ Dome head

▲ Flat head

▲ Flat head with louvre

Features

- Selectable CCT - 3000K/4000K
- Power 25W
- 3 year warranty
- C/W concrete fixings, J Bolts & Root Mount Kit is available to order separately
- IP65 & IK09 rated
- Emergency options available including self test
- Available with Flat head, Dome head or Flat head with Louvre

Applications

- Urban environment
- Residential
- Hospitality and Leisure
- Retail
- Commercial
- Pathways and Parks

