



EYELID MINI

Utilising the latest led technology, the Eyelid-Mini luminaires are perfect for providing low energy/long life lighting solutions for interior, exterior and amenity applications.

The Eyelid-Mini luminaire provides an attractive but robust solution for providing lighting to walkways, tunnels, storage areas, car parks etc.

The enclosure is sealed to IP65 and houses a geartray with HF electronic driver, photocell controller, emergency gear (where required) and LED board. The polycarbonate optic provides excellent photometric performance (1240 luminaire lumens).

Stylish and resilient

The robust cast aluminium shell and polycarbonate lens is vandal resistant and provides protection to IP65. The integrated photocell controller also has an internal switch override, giving complete control.

Dimensions


Eyelid-Mini

265mm (L) x 165mm (W) x 95mm (D)

Features

- Cast aluminium and polycarbonate construction
- Photocell activation
- Attractive and robust vandal resistant design to IP65
- Simple installation
- 14 watt, 1240 lumens LED
- Ideal for interior & exterior environments
- Emergency lighting version available
- 5 year warranty

Photometric Data

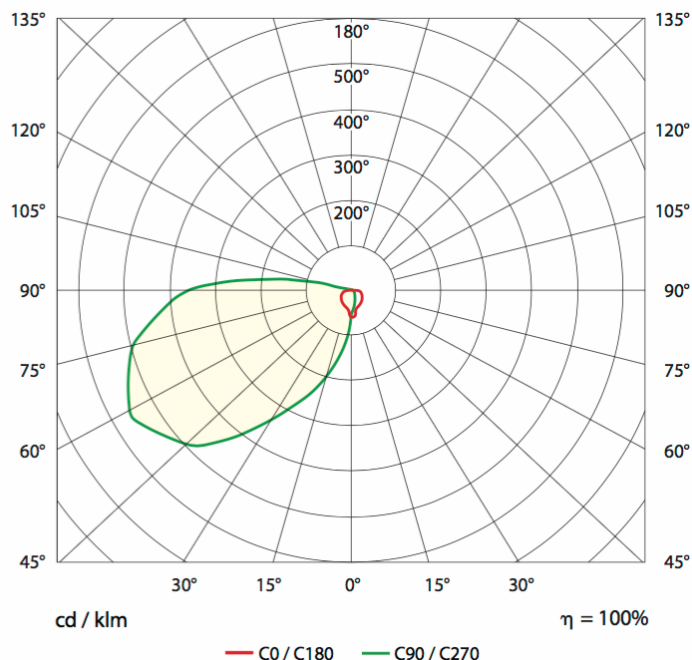

| | |
|------------------------|-------------------|
| Luminaire Lumen Output | 1240 lumens |
| Colour Temperature | 5000K as standard |
| RA | >80 as standard |
| Efficiency | 94lm/W |

Specification

| | |
|----------------------|---------------------|
| Light Source | LED (5000K) CRI >80 |
| Driver | High PF Electronic |
| Insulation Class | Class 1 - EN60598 |
| Environmental Rating | IP65 |
| Maximum Weight | 2.7kg |
| Emergency Battery | 4.8V 1.8Ah NiCd |

Order Code

| | |
|----------------|---|
| ELDLM/P/BLK | Eyelid Mini Mains c/w Photo cell, Black finish |
| ELDLM/P/M3/BLK | Eyelid Mini c/w Photo cell, Black finish- Emergency |



**Other options may be available on request*