



IMPACT LOWBAY

Product Data

Warranty	5 years
Applications	Interior
Certification(s)	UKCA, CE, RoHS

Physical Data

Colour Finish	White
Luminaire Fixing	Suspended surface solid rod mounted
Construction Material	Aluminium
Diffuser Type	Polycarbonate

Electrical Data


Voltage Range	AC220-240V
Power Factor	>0.95
Inrush Current	<60A
Protection Class IEC	Class I

Performance Data


Kelvin	4000K
Efficacy	~140-155 Lm/W
Operating Temperature	-20°C to +45°C (0°C to 40°C for emergency)
Beam Angle	120° 30° 60°
Operating Hours	>50000
CRI	>80 Ra
IP Rating	IP40
IK Rating	IK10 (with wire guard) IK08 (without wire guard)
Macadam Ellipse	≤3 sdc _m
L70 B50	100,000 hours
L80 B50	90,000 hours
L90 B50	42,000 hours
LEDs	Epistar

Dimensions (mm)

Impact 70W, 100W, 150W, 200W



Impact 320W

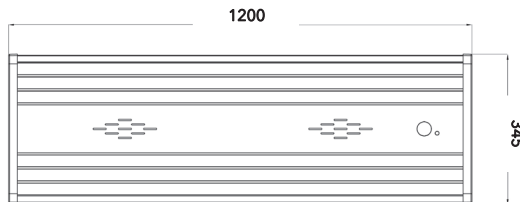

Option 1

IM/70W	IMPACT 70W 600MM 10533LM
IM/100W	IMPACT 100W 600MM 15010LM
IM/150W	IMPACT 150W 600MM 22530LM
IM/200W	IMPACT 200W 600MM 28015LM
IM/320W	IMPACT 320W 1200MM 41857LM

Option 2

/30d	30 DEGREE LENS
/60d	60 DEGREE LENS
/120d	120 DEGREE LENS

Option 3

-01	0-10V DIM
-09	DALI DIM
-05	c/w EMERGENCY M3
PIR	c/w PIR SENSOR

Ordering Part no. Format :- Option1Option2Option3

Example: IM/70W/60d-09 IMPACT 70W 60 DEGREE DALI DIM

* Please contact our sales office for other options

Impact add on items

Part code	Option
IM/SUS/ROD	IMPACT Conduit Rod Suspension Kit
IM/SUS/CHAIN	IMPACT Suspension Chain
IM/BRACK	IMPACT Multiple Application Fixing Bracket
IM/WG	Wire Guard

