















Pathfinder is a robust bollard with a classic look suitable for most applications. It has a durable extruded aluminium body and polycarbonate lens providing good levels of vandal resistance. With silver grey coated louvred controller, it provides symmetrical distribution and minimal glare.

Sealed to IP65 with silicone gasket kit.

Dome head



Flat head



Flat head with louvre

Features

- Selectable CCT 3000K/4000K
- Power 25W
- 3 year warranty
- C/W concrete fixings, J Bolts are available to order separately
- IP65 & IK09 rated
- Emergency options available including self test
- Available with Flat head, Dome head or Flat head with Louvre

Applications

- Urban environment
- Residential
- Hospitality and Leisure
- Retail
- Commercial
- Pathways and Parks
















<u>Dimensions - Line Drawing</u>

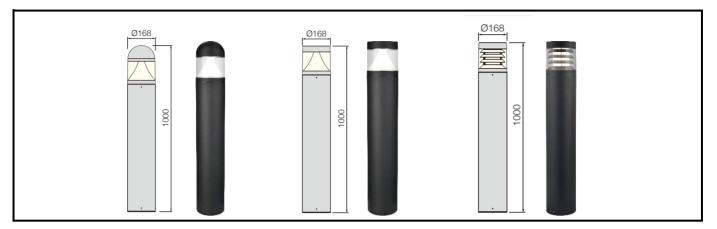

Option 1	
PF/25W/DOM/B	Pathfinder bollard, Dome head, 25W, 2CCT (4K/3K- 2400lm/2250lm), 1m, Black RAL9005
PF/25W/F/B	Pathfinder bollard, Flat head, 25W, 2CCT (4K/3K- 2400lm/2250lm), 1m, Black RAL9005
PF/25W/F/L/B	Pathfinder bollard,Flat head,Louvre reflector,25W, 2CCT (4K/3K- 950lm/915lm), 1m, Black RAL9005
Option 2	
-01	Led Mains
-Z05	C/W 3 hour Emergency
-Y05	C/W 3 hour Self Test Emergency
Option 3 (Optional- To be ordered separately if required)	
PF/J-BOLT SET	Set of J Bolts

Ordering Part no. Format: Option1Option2

Example:

PF/25W/DOM/B-Z05

Pathfinder bollard, Dome head, 25W 2400lm, Black C/W 3 hour Emergency

^{*} Please contact our sales office for other options