

RDL IP DOWNLIGHTS

Physical Data

Colour Finish	White
Construction Material	Aluminium
Mounting	Recessed


Luminaire Output

Colour Temperature	3000K 4000k
CRI	>90 Ra
Efficacy	~106 Lm/W
Beam Angle	55°
Operating Hours	50,000
IK Rating	IK05
IP Rating	IP65
L70 B50	100,000 hours

Supply & Power

Voltage Range	AC200-240V
Power Factor	>0.90
Inrush Current	<60A
Protection Class IEC	Class II
Driver	External

Dimensions (mm)

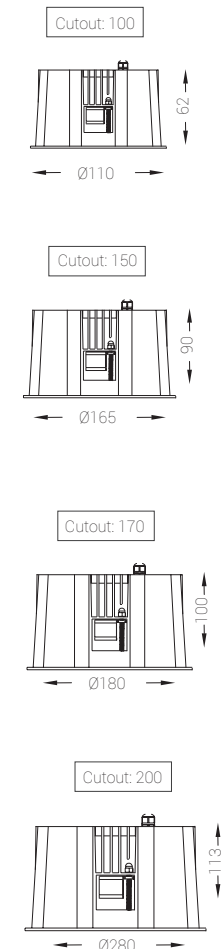

Part Code	Wattage	Lumens	Cutout (mm)	Running Current	Unit Weight (kg)
RDL4IP/8W	8W	852	100	DC200mA	0.4
RDL4IP/16W	16W	1704	100	DC400mA	0.4
RDL6IP/12W	12W	1273	150	DC300mA	0.85
RDL6IP/22W	22W	2333	150	DC540mA	0.85
RDL7IP/13W	13W	1392	170	DC350mA	0.98
RDL7IP/26W	26W	2784	170	DC700mA	0.98
RDL8IP/16W	16W	1699	200	DC400mA	1.4
RDL8IP/32W	32W	3398	200	DC800mA	1.4

Suffix	Option
3K	3000K
4K	4000K
-09	c/w DALI dimming
-Z05	c/w Emergency
-Y05	c/w Self test emergency

* Emergency and other dimming options are available. Please contact our sales office.

Reflectors

Matte Silver	/MS
Polished Chrome	/PC
White	/WT
Titanium	/TI

